




***Air Line Tubing***

[www.AirCylindersDirect.com](http://www.AirCylindersDirect.com)


## E-QR300071 Tube Cutter

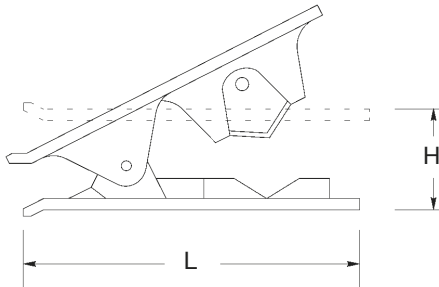

This tool will cut all plastic tubes (e.g. nylon, teflon, polyurethane, braided polyethylene, soft rubber, etc.) from 1/8" to 1/2" diameter inclusive. It is designed to give a clean cut at right angles to tube axis. A spring maintains the cutter in the closed position.

MODEL NO.	HEIGHT	LENGTH
E-QR3000 71 00	.98	3.11

## How to Order

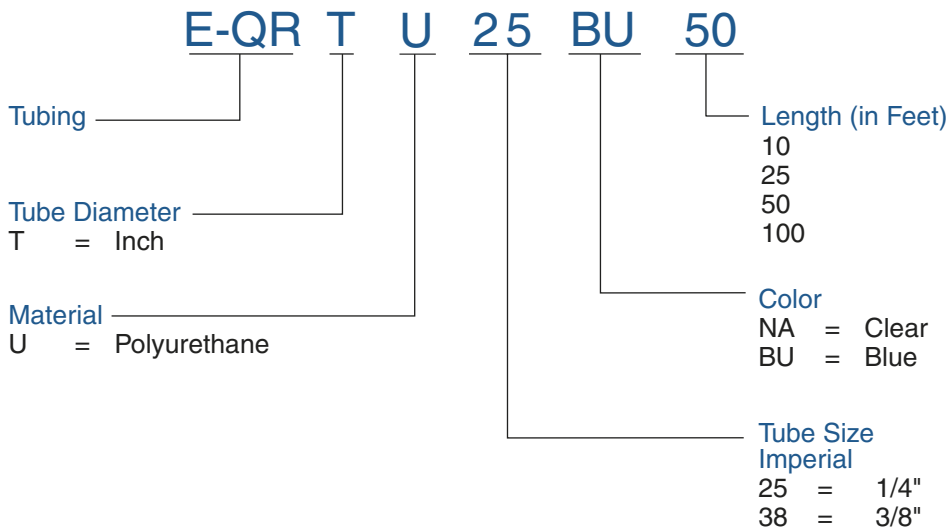

## Polyurethane Tubing

### Application

Polyurethane tubing is ideal for compressed air and vacuum systems. This rigid wall tubing is compatible with push to connect pneumatic fittings.

### Features

Has excellent abrasion resistance and shape retention while working in high humidity and low temperatures. Withstands salt water, ages well, has good vibration absorption, and excellent tear resistance.

### Specifications

- Vacuum to 28" Hg
- Temperature Range: -40° to 165° F
- UV Stabilized
- Shore 95 A
- NSF61 Compliant
- Meets UL94HB
- Dimensional Tolerance – Imperial ±.005 in.

### Inch

MODEL NUMBER*	O.D. (in.)	I.D. (in.)	WALL (in.)	MIN. BEND RADIUS	WORKING PRESSURE (PSIG)				WEIGHT lbs/100'
					@ 75°F	@ 100°F	@ 125°F	@ 150°F	
EQRTU25__	1/4	.160	.045	1/2	148	110	89	74	1.5
EQRTU38__	3/8	.245	.065	7/8	147	109	88	74	3.4



**The Online Answer to Air Applications**

*EN Series  
NFPA Interchangeable  
Cylinders*



*NR Series  
Non-Repairable  
Cylinders*



*EG Series  
Switches and  
Sensors*



*Cylinder Accessories*



*Custom Cylinders*



**plus:**

- Product Configurator**
- Cross Reference Program**
- CAD Files**

**1-866-404-5300**